

MonoX™ NeoN

LG300N1C / LG295N1C / LG290N1C / LG285N1C / LG280N1C



LG Electronics, Inc. (Korea Exchange: 06657.KS) is one of the globally leading companies and technology innovator for electronics, information and communication products. LG Electronics currently employs more than 91,000 people worldwide in 117 companies. In fiscal year 2011 a turnover of 48,97 billion USD has been achieved.

LG is one of the world's largest manufacturers of mobile phones, flat screen TVs, air conditioners, washing machines and refrigerators. As a future-oriented company, LG relies on the technology of renewable energies and is expanding it. The entire range of high quality solar products are being manufactured in LG's leading production site Korea.



LG's High Efficient Cell Technology

Driven by LG's own N-Type technology, LG's high-efficiency modules will provide customers with high economic benefits.



100% EL Test Completed

All LG modules are tested at various stages of the production by Electroluminescence inspection. The EL inspection detects cracks unseen by the naked eye.



Light and Robust

With a weight of just 16.8 kg, LG modules are proven to demonstrate outstanding durability against external pressure up to 5400 Pa.



Reliable Warranties

LG stands by its products with the strength of a global corporation and sterling warranty policies. Together with a 10 year product warranty a 25 year linear performance warranty is offered.



Positive Power Tolerance

LG provides rigorous quality testing to solar modules to assure customers of the stated power outputs of all modules, with a positive nominal tolerance starting at 0%.



Convenient Installation

LG modules are carefully designed to help installers benefit from quick and easy installations throughout carrying, grounding, and connecting stages of modules.

Mechanical Properties

Cells	6 x 10
Cell vendor	LG
Cell type	Monocrystalline
Cell dimensions	156 x 156 mm ²
Cell busbar	3
Front cover	Glass
Dimensions (L x W x H)	1640 x 1000 x 35 (mm)
Static load	5400 Pa (snow) 2400 Pa (wind)
Weight	16.8 ± 0.5 kg
Connector type	MC4 connector IP 67
Junction box	IP 67 with 3 bypass diodes
Length of cables	2 x 1000 mm
Frame	Anodized aluminum

Certifications and Warranty



Certifications	IEC 61215, IEC 61730-1/-2, ISO 14001, ISO 9001, OHSAS 18001, UL 1703
Product warranty	10 years
Output warranty of Pmax (Measurement tolerance ± 3%)	25 years linear warranty ¹

¹1st year: 97%, 2nd - 25th year: -0.7%/a, 25th year: 80,2%

Temperature Coefficients

NOCT	45 ± 2 °C
Pmpp	-0.42 %/K
Voc	-0.31 %/K
Isc	0.03 %/K

Characteristic Curves

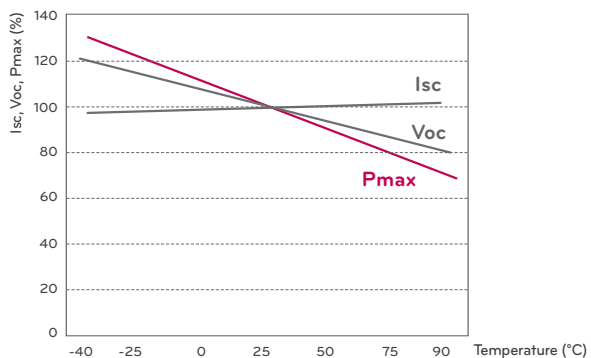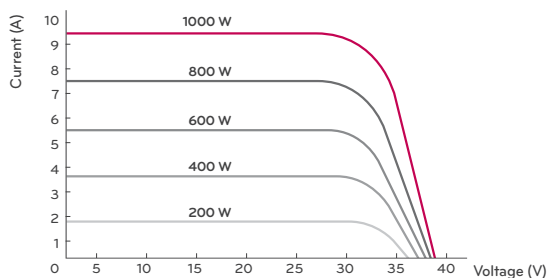

Electrical Properties (STC²)

	300 W	295 W	290 W	285 W	280 W
Maximum power Pmax (W)	300	295	290	285	280
MPP voltage Vmpp (V)	32.0	31.9	31.8	31.6	31.5
MPP current Impp (A)	9.42	9.30	9.19	9.09	8.97
Open circuit voltage Voc (V)	39.5	39.3	39.2	39.0	38.9
Short circuit current Isc (A)	10.0	9.91	9.80	9.68	9.56
Module efficiency (%)	18.3	18.0	17.7	17.4	17.1
Operating temperature (°C)	-40 ~ +90				
Maximum system voltage (V)	1000				
Maximum series fuse rating (A)	15				
Power tolerance (%)	0 ~ +3				

² STC (Standard Test Conditions): Irradiance 1000 W/m², module temperature 25 °C, AM 1.5

Application Class: A (according to IEC 61730), Safety Class: II


The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

Electrical Properties (NOCT³)

	300 W	295 W	290 W	285 W	280 W
Maximum power (Pmpp)	220	216	213	210	206
MPP voltage (Vmpp)	29.3	29.2	29.1	28.9	28.8
MPP current (Impp)	7.51	7.42	7.33	7.25	7.15
Open circuit voltage (Voc)	36.5	36.3	36.2	36.0	35.9
Short circuit current (Isc)	8.08	7.98	7.89	7.80	7.70
Efficiency reduction (from 1000 W/m ² to 200 W/m ²)	< 4.5 %				

³ NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

Dimensions (mm)

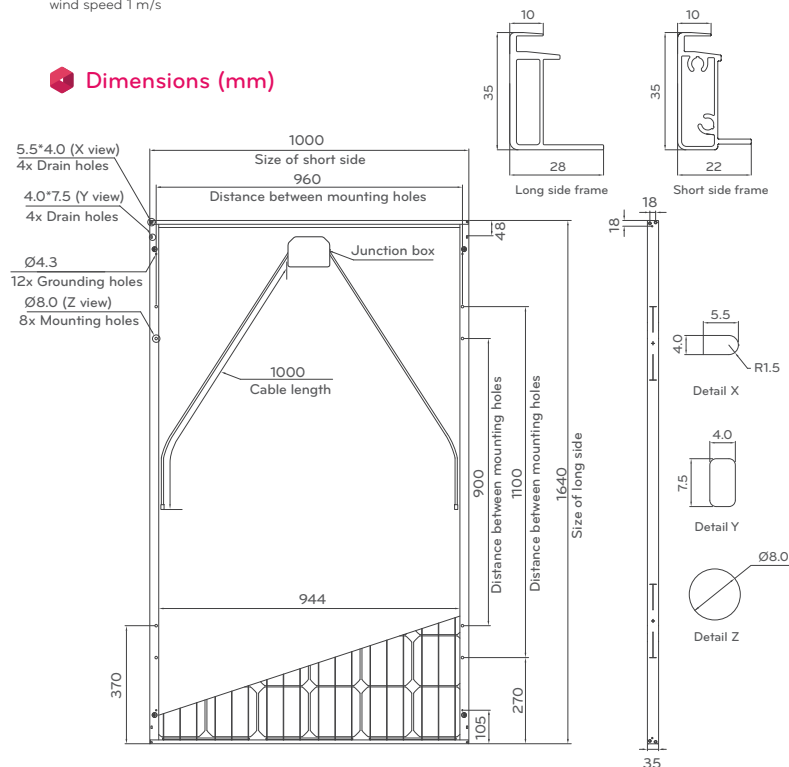

The distance is between the center of the mounting/grounding wholes.



LG
Life's Good

LG Electronics Deutschland GmbH
EU Solar Business Group
Berliner Straße 93
40880 Ratingen, Germany
Email: solar@lge.de

www.lg.com/uk/solar

All specifications of this data sheet comply with DIN EN 50380.

Subject to change without notice.

Status: 02/2013

Document: DS-NIC-G3-EN-201302

Copyright © 2013 LG Electronics. All rights reserved.

